

## Product Datasheet

### 54V Large cell module

- Rated voltage 54VDC 166F capacitance
- High cycle life of 1 million cycles
- Excellent energy and power density
- Laser welded internal connections
- Robust and vibration proof design
- Active cell balancing
- Voltage and temperature monitoring



#### ELECTRICAL SPECIFICATIONS

Type	M23W-054-0166
Rated Voltage $V_R$	54.00 V
Surge Voltage $V_S^1$	55.00 V
Rated Capacitance $C^2$	166 F
Capacitance Tolerance <sup>3</sup>	0% / +20%
DC ESR <sup>2</sup>	<6 m $\Omega$
Leakage Current $I_L^4$	<12 mA
Constant Current ( $\Delta T = 15^\circ C$ ) <sup>5</sup>	79 A
Max Current $I_{Max}^6$	2.2 kA
Short Current $I_S^7$	9 kA
Stored Energy $E^8$	67.5 Wh
Energy Density $E_d^9$	4.4 Wh/kg
Usable Power Density $P_d^{10}$	4 kW/kg
Matched Impedance Power Density $P_{dMax}^{11}$	8 kW/kg

#### THERMAL CHARACTERISTICS

Type	M23W-054-0166
Working Temperature	-40 ~ 65 °C
Storage Temperature <sup>12</sup>	-40 ~ 70 °C
Thermal Resistance $R_{Th}^{13}$	0.4 °C/W
Thermal Capacitance $C_{Th}^{14}$	13'000 J/°C

#### LIFETIME CHARACTERISTICS

Type	M23W-054-0166
DC Life at High Temperature <sup>15</sup>	1500 hours
DC Life at RT <sup>16</sup>	10 years
Cycle Life <sup>17</sup>	1'000'000 cycles
Shelf Life <sup>18</sup>	4 years

#### SAFETY & ENVIRONMENTAL SPECIFICATIONS

Type	M23W-054-0166
Safety	RoHS, REACH
Vibration	IEC60068-2-6
Shock	IEC60068-2-28, 29

## MONITORING AND CELL VOLTAGE MANAGEMENT


Type	M23W-054-0166
Internal Temperature Sensor	NTC 3950 10kΩ
Temperature Interface	Analog
Connector	Deutsch DTM04-4P
Cell Voltage Monitoring and Management	Active CMS

## PHYSICAL PARAMETERS

Type	M23W-054-0166
Mass M	14.5 kg
Terminals	M10 <sup>19</sup>
Dimensions <sup>20</sup> Length	418 mm
Width	194 mm
Height	179 mm


## NOTES:

- Surge voltage  $V_S$ : Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.
- Capacitance C: The test current is 0.075 A/F, if the calculated current is  $>100A$ , then apply 100A.

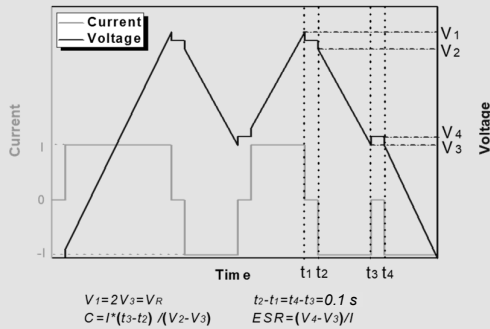

- Capacitance tolerance: Typical tolerance is +5%~+10%.
- Leakage current measurement procedure: 1) Charge the capacitor to the  $V_R$  with a constant current (0.075 A/F, if the calculated current is  $>100A$ , then apply 100A). 2) Hold the voltage at  $V_R$  for 72h. 3) The current to maintain  $V_R$  after 72 h is the leakage current.
- Max constant working current:  $I_{MCC} = \sqrt{\Delta T / (ESR * R_{Th})}$
- Max current:  $I_{Max} = 0.5C * V_R / (\Delta t + ESR * C)$ , discharge from  $V_R$  to  $V_R/2$  in 1 second.
- Short circuit current:  $I_S = V_R / ESR$
- Stored energy:  $E = 0.5C * V^2 / 3600$
- Energy density:  $E_d = E / M$
- Usable power density:  $P_d = (0.12V_R^2 / ESR) / M$
- Matched impedance power density:  $P_{dMax} = (0.25V_R^2 / ESR) / M$
- Storage in discharge state.
- Thermal resistance:  $R_{Th} = \Delta T / P$ , where  $P = ESR * I^2$
- Thermal capacitance is indicated for the whole module.

- DC life at high temperature: Hold the capacitor charged at rated voltage at 65°C for 1500h. The capacitance shall be  $>80\%$  of the rated value, the ESR shall be  $<200\%$  of the rated value. DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be  $>80\%$  of the rated value, the ESR shall be  $<200\%$  of the rated value.
- Cycle life: Charge and discharged the capacitor in the range between  $V_R$  and  $V_R/2$ . 5 seconds waiting period between charge and discharge. The constant test current is 0.075 A/F (if the calculated current  $>100A$ , then apply 100A).
- Shelf life: Discharged and no load applied at RT.
- The maximum torque is 25Nm for M10, 14-18Nm for M8
- Dimensions:

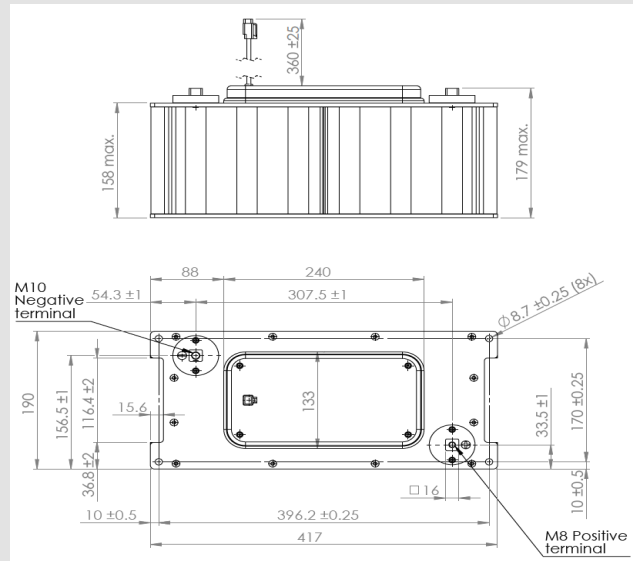

### Notes:

#### Standard markings:

- + Name of manufacturer, part number, serial number
- + Rated voltage and capacitance, negative and positive terminals, warning marking
- + Stored energy in watt-hours

The contents of this document are subject to change without notice. SECH accepts no liability for the accuracy or credibility of the values and information contained in this document.