

## Product Datasheet

### 60mm Ø Ultracapacitors – threaded type

- Rated voltage 2.7VDC
- 5000F capacitance
- Ultra-low ESR,
- High cycle life of 1 million cycles
- Excellent DC life performance
- Laser-weldable posts
- Very high energy and power density



#### ELECTRICAL SPECIFICATIONS

Type	C60W-2R7-5000
Rated Voltage $V_R$	2.70 V
Surge Voltage $V_S^1$	2.80 V
Rated Capacitance $C^2$	5000 F
Capacitance Tolerance $^3$	-0% / +20%
ESR $^2$ (DC)	<0.25 mΩ
ESR $^2$ (AC, 1 kHz)	<0.22 mΩ
Leakage Current $I_L^4$	<12 mA
Self-discharge Rate $^5$	<20%
Constant Current ( $\Delta T = 15^\circ C$ ) $^6$	136 A
Max Current $I_{Max}^7$	3.0 kA
Short Current $I_S^8$	10.8 kA
Stored Energy $E^9$	5.1 Wh
Energy Density $E_d^{10}$	10.1 Wh/kg
Usable Power Density $P_d^{11}$	6.9 kW/kg
Matched Impedance Power Density $P_{dMax}^{12}$ , 10 Hz ESR	14.4 kW/kg
Matched Impedance Power Density $P_{dMax}^{12}$ , 1 kHz ESR	16.4 kW/kg

#### THERMAL CHARACTERISTICS

Type	C60W-2R7-5000
Working Temperature	-40 ~ 65°C
Storage Temperature $^{13}$	-40 ~ 70°C
Thermal Resistance $R_{Th}^{14}$	3.2 K/W
Thermal Capacitance $C_{Th}^{15}$	575 J/K

#### LIFETIME CHARACTERISTICS

Type	C60W-2R7-5000
DC Life at High Temperature $^{16}$	1500 hours
DC Life at RT $^{17}$	10 years
Cycle Life $^{18}$	1'000'000 cycles
Shelf Life $^{19}$	4 years

#### SAFETY & ENVIRONMENTAL SPECIFICATIONS


Type	C60W-2R7-5000
Safety	RoHS, REACH and UL810
Vibration	ISO 16750-3 Table 12
	IEC 60068-2-64 (Table A.5/A.6)
Shock	IEC 60068-2-27 18x 100g 6ms

## PHYSICAL PARAMETERS

Type	C60W-2R7-5000
Mass M	505 g
Terminals	Weldable
Dimensions 20	Height L
	Diameter
	138 mm
	60 mm

## NOTES:


- Surge voltage  $V_S$ : Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.
- Capacitance C: The test current is 0.075 A/F, if the calculated current is >100A, then apply 100A.
- DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be >80% of the rated value, the ESR shall be <200% of the rated value.
- Cycle life: Charge and discharged the capacitor in the range between  $V_R$  and  $V_R/2$ . 5 seconds waiting period between charge and discharge. The constant test current is 0.075 A/F (if the calculated current >100A, then apply 100A).
- Shelf life: Discharged and no load applied at RT.
- Dimensions:

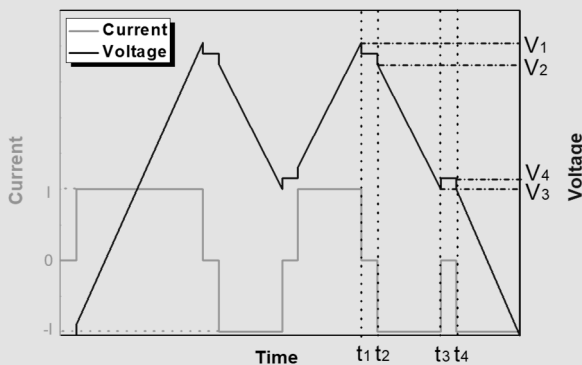

$$V_1 = 2V_3 = V_R \quad t_2 - t_1 = t_4 - t_3 = 0.1 \text{ s}$$

$$C = I \cdot (t_3 - t_2) / (V_2 - V_3) \quad ESR = (V_4 - V_3) / I$$

- Capacitance tolerance: Typical tolerance is +5%~+10%.
- Leakage current measurement procedure: 1) Charge the capacitor to the  $V_R$  with a constant current (0.075 A/F, if the calculated current is >100A, then apply 100A). 2) Hold the voltage at  $V_R$  for 72h. 3) The current to maintain  $V_R$  after 72 h is the leakage current.
- Self-discharge rate measurement procedure: 1) Charge the capacitor to  $V_R$  with a constant current (0.075 A/F, if the calculated current >100A, then apply 100A). 2) Hold the voltage at  $V_R$  for 3h. 3) Floating for 72h. 4) Measure the voltage after 72 h.
- Max constant working current:  $I_{MCC} = \sqrt{\Delta T / (ESR * R_{Th})}$
- Max current:  $I_{Max} = 0.5C * V_R / (\Delta t + ESR * C)$ , discharge from  $V_R$  to  $V_R/2$  in 1 second.
- Short current:  $I_5 = V_R / ESR$
- Stored energy:  $E = 0.5C * V^2 / 3600$
- Energy density:  $E_d = E / M$
- Usable power density:  $P_d = (0.12V_R^2 / ESR) / M$
- Matched impedance power density:  $P_{dMax} = (0.25V_R^2 / ESR) / M$
- Storage temperature: Storage in discharge state at RT.
- Thermal resistance:  $R_{Th} = \Delta T / P$ , where  $P = ESR * I^2$
- Thermal capacitance is indicated for the whole product.
- DC life at high temperature: Hold the capacitor charged at rated voltage at 65°C for 1500h. The capacitance shall be >80% of the rated value, the ESR shall be <200% of the rated value.

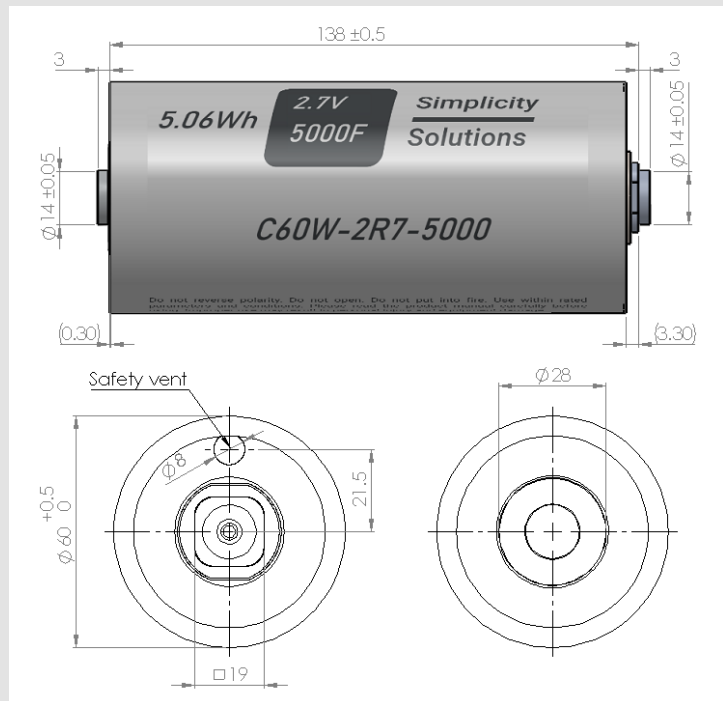

### Standard markings:

- + Name of manufacturer, part number, serial number
- + Rated voltage and capacitance, negative and positive terminals, warning marking
- + Stored energy in watt-hours

### Mounting recommendations:

- + Mounting without applying undue mechanical stress on the terminals
- + Provide adequate spacing in between cells to secure required insulation strength
- + Provide clearance around the safety vent and do not position anything above the safety vent that may be damaged in an event of vent rupture

The contents of this document are subject to change without notice. SECH accepts no liability for the accuracy or credibility of the values and information contained in this document.